

Access Control Products

Model: AMI-FRT100

Contactless Temperature Detection
+ Face Recognition + Data Reporting

- ### Infrared Thermography Testing

Resolution: 32*32
Error range: ± 0.3 °C
Thermometry distance: 50-70cm
Capability: One Person, One Time


- ### Binocular Liveness Detection

Recognition rate > 99.5%

- ### 8 Inch Touch Screen

Display measured temperature

- ### NFC Card Reader

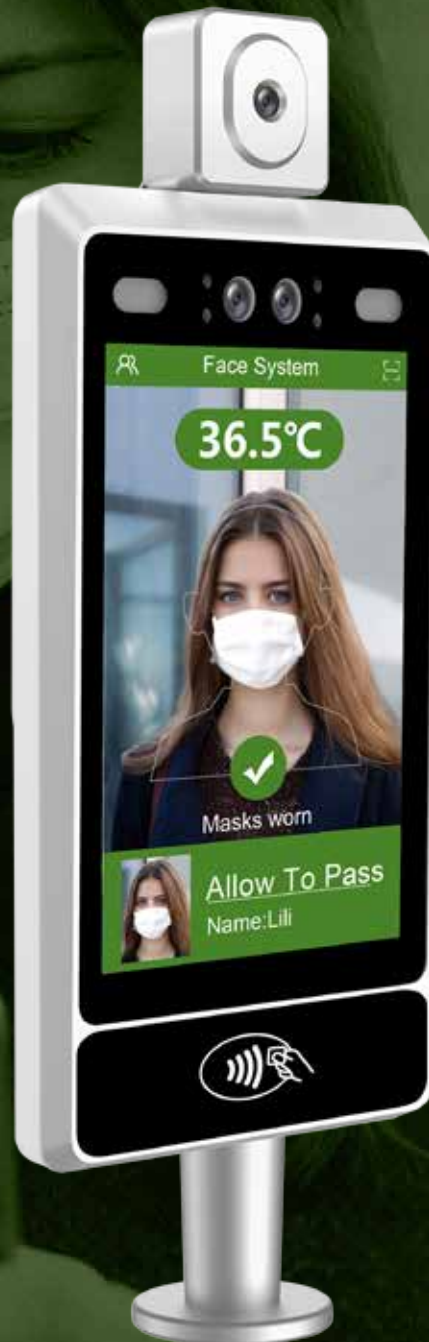

Offices



Factories



Schools
& Colleges



Hospitals



Public
Transport



Sports
Venues



Concerts
Movie Theatres

Model: AMI-FRT100

Contactless Temperature Detection + Face Recognition
+ Data Reporting

Specifications	
Chipset (Alternative)	Chipset: Rockchip OS: Android 7.1 CPU: Dual-Core 1.8GHz + Quad-Core 1.4 GHz Memory: 4GB DDR, 16GB eMMC
	Chipset: Qualcomm OS: Android 8.1 CPU: Octa-Core 1.8GHz Memory: 2GB DDR, 16GB eMMC
Display	8-inch, 800 *1280
Keys	1 Reset Key
Sensor (Optional)	Infrared Sensor
Front Camera	Dual-lens Camera (RGB+IR) Single-lens Camera (RGB) (Optional) 3D Depth Sensing Camera (Optional)
Fill Light	White LED
Contactless Card Reader (Optional)	ISO 14443 Type A/B, Mifare, IOS 18092 Compliant
SIM Slots (Optional)	1 SIM
Communications	Ethernet/WiFi/Bluetooth LTE (Optional)
Temperature Measurement	Distance: 50~70cm Accuracy: ± 0.3 °C
Peripheral Ports	1 DC Port, 1 RG45, 1 Micro USB, 1 Wiegand, 1 RS485
Audio	Digital Audio Speaker, Microphone
Power Supply	12V/2A, POE (Optional)
Bracket (Optional)	Wall Mount Bracket, Turnstile Mount Bracket
Dimensions (mm)	323 (L) * 135 (W) * 30 (H)
MDM (Optional)	Mobile Device Management
Certifications	CE, RoHS, FCC

